

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/035245 A1

- (51) International Patent Classification⁷: B22C 9/04, 9/10, 7/06, 7/02
- (21) International Application Number: PCT/IT2002/000771
- (22) International Filing Date: 9 December 2002 (09.12.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
BS/2002/A/000088 4 October 2002 (04.10.2002) IT
- (71) Applicant (for all designated States except US): MECCANICA BASSI S.P.A. [IT/IT]; 83, Via Triumplina, I-25123 Brescia (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BASSI, Bruno [IT/IT]; 18, Via Panoramica, I-25128 Brescia (IT).
- (74) Agents: CRIPPA, Paolo, Ernesto et al.; Jacobacci & Partners S.p.A., Piazzale Arnaldo, 2, I-25121 Brescia (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CASTING PROCEDURE, PARTICULARLY FOR ENGINE CYLINDER HEAD

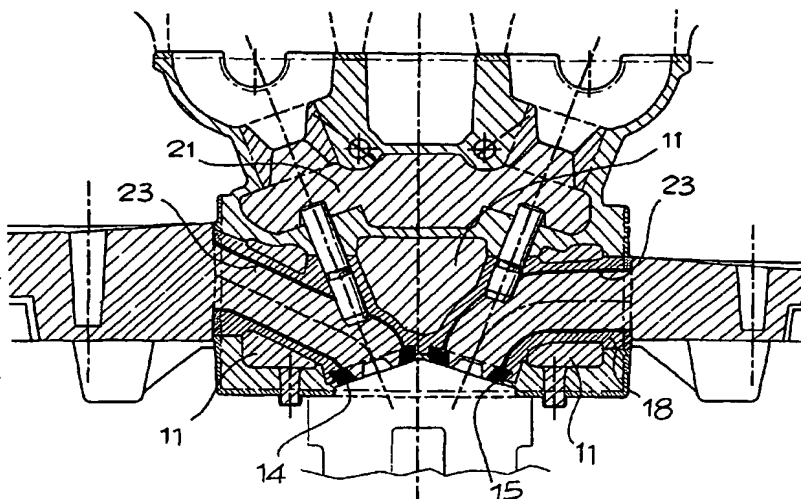

(57) Abstract: The present invention relates to a casting procedure for obtaining parts provided with inside cavities or holes, wherein said holes and/or cavities are obtained by laying into a mould or chill, intended to receive the molten metal, one or more cores made of sand or other material, and wherein a main core is used, realised into a special core box, along one or more secondary cores intended to be associated to said main core, comprising the following steps: coating at least one secondary core, only in the zones and by the pattern thickness with a layer of material intended to dissolve in contact with the molten metal; inserting the pre-coated secondary cores into the main core box yet to be moulded; moulding the main core box; and inserting the monolithic group obtained at the previous step, consisting of the main core, of the secondary cores and of the coating material that keeps them firmly connected, into the mould or chill intended to receive the molten metal. The cores to be coated can also be formed by hollow inserts (23) made of a heat resistant material, filled with sand polymerised resin, wherein the cavity represents the core pattern.